

**MOTOR GH5FHB; F 9@5M
.....TYPE ?@L CB (7F**



User's manual



?@L CB `(7F

Motor Starting Relay

All position, current-type

KEY BENEFITS

Reliable operation and long life independent of mounting position

Wide range of pick-up and drop-out ratings

Start-winding current rating - 25 amps

Small size for installation in compact equipment

Economical

The Klixon 4CR current type motor starting relay is a compact, high capacity relay, designed for universal application to split-phase and capacitor start, single-phase motors with start-winding currents up to 25 amperes.

Construction

The 4CR relay utilizes a balanced armature to provide positive operation independent of mounting position. Double-break bonded Top-lay contacts provide excellent electrical and thermal conductivity to provide the high switching capacity and long electrical life. Silver cadmium oxide is used for the 25 amp contacts.

Mounting and Terminals

The 4CR relay's compact size and universal mounting allow cost saving reductions in motor size and elimination of centrifugal switches. Mounting can be in the motor, in the conduit box, or remote from the motor. Calibrated in one position for a specific

pick-up and drop-out, the 4CR remains within tolerance in all other mounting positions. A variety of mounting brackets, terminals and assembly screw extensions are available to meet any mounting requirements.


Pick-up and Drop-out Ratings

Ratings indicated maximum pick-up and minimum drop-out current limits. Pick-up is the current through the relay coil required to close the relay contacts. Drop-out is the current through the relay coil at which the contacts open. A production relay of a given rating will have a pick-up and drop-out current within the rating limit.


Operation

The 4CR relay coil is in series with the main winding of the motor and the normally open contacts are in series with the start winding. When voltage is applied to the motor, the in-rush current of the main winding through the relay coil creates a magnetic force which rotates the armature. This action closes the relay contacts and energizes the motor start winding.

As motor speed increases, the current in the main winding and relay coil decrease to a point where the armature biasing spring force is greater than the decreasing magnetic force, and the armature rotates back to its original position. This opens the relay contacts and disconnects the start winding.

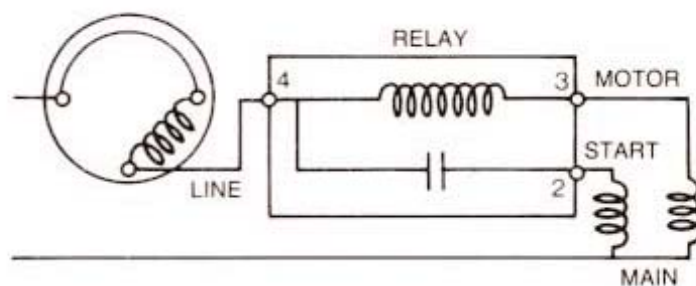

Sample Code

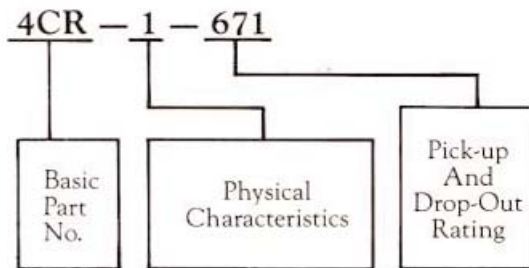

Type	A ax"DJW'l d A	A in"8fcd'Ci h A
4CR1- 615	1,78	1,47
4CR1- 625	2,54	2,10
4CR1- 630	3,05	2,50
4CR1- 633	3,35	2,75
4CR1- 634	3,45	2,85
4CR1- 635	3,55	2,95
4CR1- 640	4,05	3,35
4CR1- 643	4,35	3,60
4CR1- 648	4,85	4,00
4CR1- 650	5,10	4,20
4CR1- 655	5,60	4,60
4CR1- 660	6,10	5,05
4CR1- 666	6,70	5,50
4CR1- 670	7,10	5,90
4CR1- 675	7,60	6,30
4CR1- 680	8,10	6,70
4CR1- 681	8,20	6,80
4CR1- 685	8,60	7,10
4CR1- 689	9,00	7,50

Type	A ax"DJW'l d A	A in"8fcd'Ci h A
4CR1 690	9,10	7,50
4CR1 695	9,60	7,90
4CR1 700	10,20	8,40
4CR1 702	10,60	8,70
4CR1 707	11,60	9,60
4CR1 709	12,00	9,90
4CR1 712	12,60	10,40
4CR1 719	14,00	11,50
4CR1 724	15,00	12,40
4CR1 725	15,20	12,50
4CR1 729	16,00	13,20
4CR1 732	16,60	13,70
4CR1 735	17,30	14,30
4CR1 748	19,90	16,40
4CR1 758	21,90	18,10
4CR1 760	22,30	18,40
4CR1 770	25,00	20,60
4CR1 777	27,40	22,60
4CR1 781	29,40	24,30

